



**DF-MK530 – RV Streamline Pull-Down Kitchen
Faucet**



MAINTENANCE AND CLEANING

Cleaning Tips: The finish on your product is designed to retain its beautiful sheen for years. To maintain the original look of the finish, a little care and caution should be used. We recommend the use of mild soap and water to clean the product.

THE USE OF ABRASIVE CLEANERS MAY SCRATCH THE FINISH OR CAUSE OTHER DAMAGE.

RECOMMENDED TOOLS AND MATERIALS

- ◆ Adjustable Wrench
- ◆ Plumbers Tape (Thread Seal Tape)
- ◆ Phillips Screw Driver

BEFORE YOU BEGIN

There are a variety of things to do before installing any new plumbing system into your RV. Before you begin work make sure you:

- ◆ Shut off the main water supply
- ◆ Cover your drain to prevent loss of parts
- ◆ Observed any local plumbing codes
- ◆ Inspect fixture for damage - Replace as necessary

* Dura Faucet reserves the right to make any revisions in the design of products without notice.


INSTALLATION OF THE FAUCET

1 New Faucet Preparation

First, shut off the water supply and remove the old faucet by disconnecting it from the supply lines under the sink, and unscrewing the faucet from the countertop by removing mounting nut and washers. Next, clean the sink's top surface in preparation for the new faucet.


2 Fasten Deck Plate (Optional)

The base plate can be used without a sealant, but if desired apply plumber's putty or other suitable sealant to the bottom edges of the base plate (optional). Once applied, align base plate and press into place to firmly attach to the sink. Lastly, remove excess plumber's putty and place deck plate onto base plate.

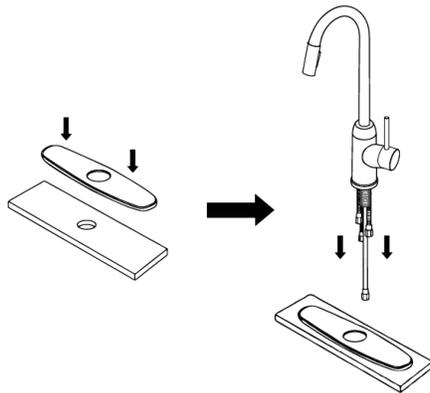


3 Secure Faucet

Remove the lock-nut and washers provided. Place the faucet on sink top and feed hoses down through the center hole in the sink as the hoses fit into the grooves of the 3 washers. Next, from below the sink, secure the faucet by re-attaching the washers and lock-nut and screwing it down until tight.

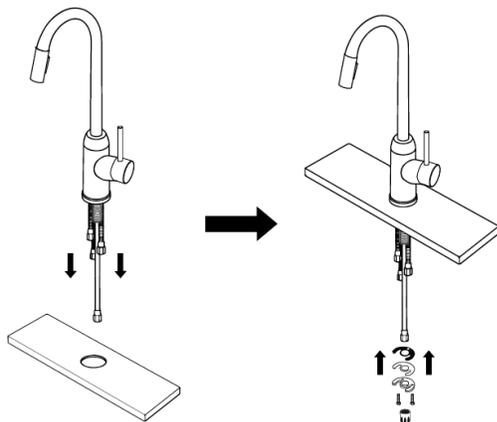


4 Connect Supplies

Securely attach marked supply lines with corresponding hot (A) and cold (B) hoses from the faucet. Tighten all connections with wrench to ensure that no leaking occurs. With all connections plumber's tape can be utilized to help reduce the risk of leaking.

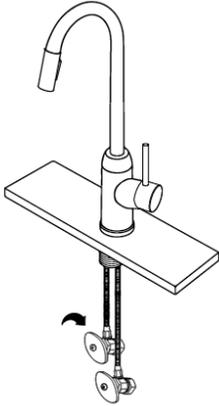

5 Install Weight

Attach the weight to the hose at a length suitable to you (the further from the end you place the weight the longer your reach will be when pulling the hose out for use). You may move the weight to adjust the pull-down length of the hose. Carefully tighten the weight.

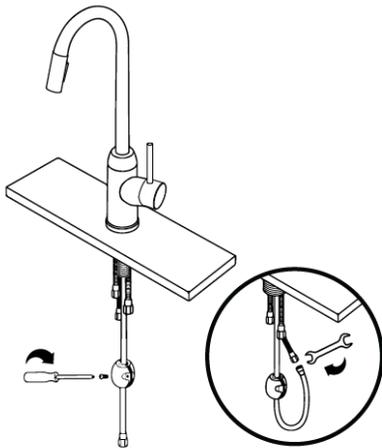

6 Flush Lines

Once installation of the hoses is complete, remove the spray head. Turn the water supply on and allow both hot and cold water to run for at least 30 to 60 seconds each. While water is running, check for leaks around and under the sink. Once done replace aerator and start enjoying your new Dura Faucet.

