




# DURA FAUCET®

**DF-SA180 - RV Exterior Quick Connect with Dual Handles**

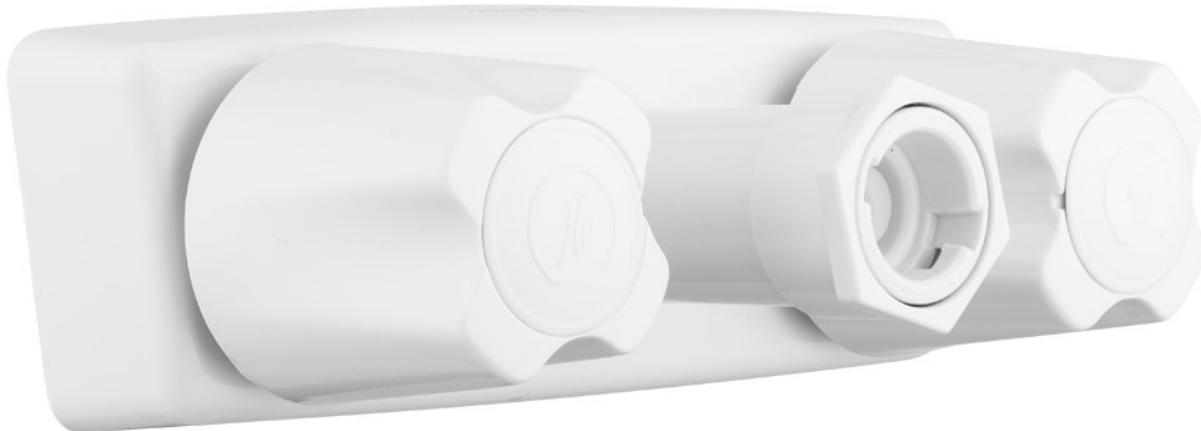

## MAINTENANCE AND CLEANING

Cleaning Tips: The finish on your product is designed to retain its beautiful sheen for years. To maintain the original look of the finish, a little care and caution should be used. We recommend the use of mild soap and water to clean the product.

THE USE OF ABRASIVE CLEANERS MAY SCRATCH THE FINISH OR CAUSE OTHER DAMAGE.

## RECOMMENDED TOOLS AND MATERIALS

- ◆ Adjustable Wrench
- ◆ Plumber's Tape

## BEFORE YOU BEGIN

There are a variety of things to do before installing any new plumbing system into your RV. Before you begin work make sure you:

- ◆ Shut off the main water supply
- ◆ Cover your drain to prevent loss of parts
- ◆ Observed any local plumbing codes
- ◆ Inspect fixture for damage - Replace as necessary

\* Dura Faucet reserves the right to make any revisions in the design of products without notice.

## INSTALLATION

### 1 New Faucet Preparation Preparation

Shut off the water supply and remove the old faucet by disconnecting it from the supply hoses behind your shower box. Clean off any debris from inside shower box and water supply tubes in preparation for the new faucet.

### 2 Install Both Shower Faucet and Sprayer Hoses

Route the water supply hose from behind the shower box through to the exterior side, and then tighten the nuts on the back of the shower box into place. Next, if desired, attach your sprayer hose into the water diverter, which is found between the two faucet's knobs.

### 3 Turn on Water Supply and Check for Leaks

Once installation of hoses is complete, turn the water supply on and allow both hot and cold water to run for at least 30 to 60 seconds each. While water is running, check for leaks not only inside and outside of the shower box, but also internally behind the shower box where water supply hoses are connecting. Everything look good? Great. Now you can start enjoying your new Dura Faucet product!

## SPEC DRAWING / PARTS

