

© SnapPad®


STAKPAD™

INSTRUCTIONS



StakPad™ Specifications

1. 12" x 12" x 2" high with rubber top installed
(12" x 12" x 1.75" high without rubber top installed)
2. 8.4lb per StakPad™
3. 40,000 lbs weight capacity*
4. Recycled crumb rubber base and top (Made in USA)
Partially recycled thermoplastic middle
(Made in Canada)
5. Manufactured, hand-assembled, packaged, and
shipped in both the USA & Canada

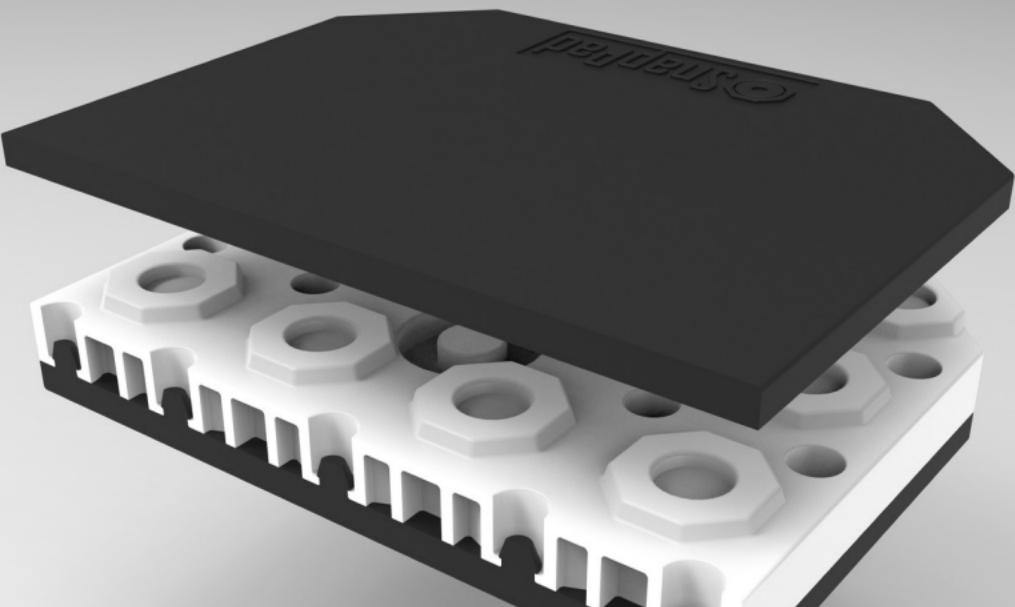

* Weight capacity is based on an equally dispersed load on a single StakPad™, supported by a solid surface. Weight capacity can not be confirmed for all terrain and load types.

STAKPAD™

How to Use Under a Hydraulic Jack or Stabilizer

StakPad™ assists in the leveling of your RV by decreasing jack stroke and by increasing grip / ground contact surface area. It is optimized to work in conjunction with SnapPads, but can be used with any jack / stabilizer foot.

1. Place a single StakPad™ on the ground with the handle facing outward, perpendicular to the direction of the RV.
2. If additional height is required, place additional StakPads on top of the first one, ensuring the rubber bottom of each pad is properly interlocking with the StakPad™ above it.
3. Finish the stack by placing a rubber topper on the top StakPad™.

Do NOT stack StakPad™ with the rubber topper attached. Only place the rubber topper on top of the last StakPad™.



Tongue Jack on
Travel & Utility
Trailers

Use Up to 6 StakPads



Travel Trailer &
5th Wheel
Stabilizers

Use Up to 4 StakPads



Motorhome
Hydraulic Jacks

Use Up to 2 StakPads

4. Lower your jacks or stabilizers down directly onto the StakPad, ensuring your leveling foot is centered on the stacker. Do not place any additional products or items between the StakPad™ and foot on your leveling or stabilizing system.

Note: You should never use a StakPad under your jacks to lift the tires of your RV off of the ground.

StakPads have a recess specifically designed for a tongue jack pipe (without the foot). Use without a rubber topper and stack up to four high (as shown).



BONUS

Each StakPad™ has a recess specifically designed for a tongue jack pipe (without the foot). Use without a rubber topper and stack up to four high (as shown).

instructions continued on the next page



STAKPAD™

How to Use Under Tires as a Drive-On Leveler

StakPad™ can be used as a drive-on product for leveling your RV from side-to-side or front-to-back. In most cases, a single StakPad™ should be sufficient.

1. Place a single StakPad™ on firm, flat ground, with the handle facing out (perpendicular to the RV).

Note: Use of the rubber topper is optional for Drive-On applications, and not required.

2. Slowly and smoothly drive your RV / Trailer up onto the StakPad™, ensuring your tire reaches the middle of the StakPad™.

Note: Do NOT drive on or over the handle! It is not recommended to stack StakPads more than 2-high in a drive-on application.

- 2a. If more lift is required than can be provided by a single StakPad™, a pyramid can be constructed using three StakPads.

3. Place two StakPads directly next to each other on firm, flat ground, with the handle facing out.

4. Place a third StakPad™ on top, ensuring it bridges both bottom StakPads and that it's properly locked into place. Ensure the top StakPad is oriented with the handle facing out.

5. Slowly and smoothly drive your RV / Trailer up onto the pyramid, ensuring your tire is centered on the StakPads. Stop when your tire reaches the middle of the top StakPad™.

Warranty

Origen RV Accessories LTD offers a 2-year manufacturer's warranty on both performance and defects in material and workmanship.


Should your product fail within a 2-year time frame, Origen RV Accessories LTD will replace your pad free of charge. Warranty coverage does not extend to acts of God, misuse of product, improper installation, and damage from external events like accidents.

Conditions

- Register your product warranty first in order to be able to file a claim later on, if necessary. For more information, visit rvsnappad.com/pages/general-warranty.
 - If your StakPad™ was purchased from Amazon, we encourage you to contact them for your replacement/refund.
 - Origen RV Accessories LTD will replace any defective products within the acceptable 2-year window, starting from the purchase date.
 - To submit your warranty claim please visit rvsnappad.com/pages/file-a-claim.
 - Proof of purchase is required for any warranty redemption on your pads.
 - If you need to return your UNUSED pads within 30 days of purchase please contact our Customer Service Agents at info@rvsnappad.com.
 - Be advised the product must be shipped back to Origen RV Accessories LTD at your cost, meaning you pay the shipping charges for returning any pads.
 - Once shipped, email your tracking number to info@rvsnappad.com for confirmation and then your refund will be issued.
-

Disclaimers

- StakPad™ and RV SnapPads are an aftermarket RV accessory, and as such, it is the responsibility of the RV owner to ensure they are an appropriate and safe addition to their RV.
- Each RV has unique design considerations. It is the responsibility of the RV owner to confirm their StakPad™ will not hinder the functionality of any other system.
- Origen RV Accessories LTD shall not be liable for any special, incidental, indirect or consequential damages whatsoever (including but not limited to, labor, installation, charges, damage to associated equipment, RV, trailer, towing or following vehicle) arising from the use or inability to use or install the product.
- Use extreme caution when installing and using StakPad™. Origen RV Accessories LTD is not responsible or liable in any way for any indirect or direct injury sustained during installation or future use of the product.
- Origen is not responsible for any issues arising from the use of our products on non-compatible systems or in a manner not described in these instructions.

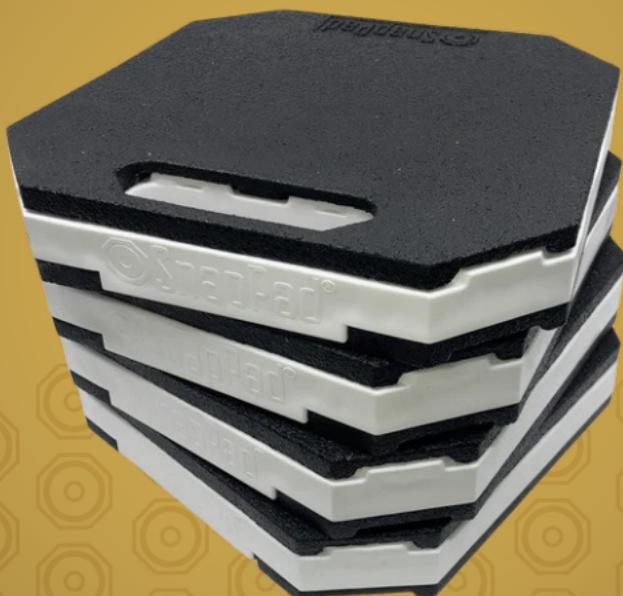

Scan for Videos & More

Scan to view detailed instructions,
warranty & disclaimers.

Questions?

1-866-923-9538 | info@rvsnappad.com | rvsnappad.com